

Detailed Estimate

SoR Period: 10/04/2025 - 31/03/2026 Created By: SANJAY KUMAR SINGH

MISROULI ME RAMANAND KE KHET SE ATAVRIYA KE KHET TAK MITTI CHAKMARG

3156004040/RC/VB/YD/958486255824278993


BLOCK: BADRAON, GRAMA PANCHAYAT : MISROULI

Heading / Description: 1 - Item of work								
1	77.TM.A.19.1.AF -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Female)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Earthwork in filing.								
1	00.00 to 250.00 m	5	50.000	(3.00+4.60)/2	0.800	1.0	760.0000	-
2	250.00 to 270.00 m	1	20.000	(3.00+4.60)/2	0.800	1.0	60.8000	-
Existing in earth work quantity.								
3	00.00 to 100.00 m	2	50.000	1.620	(0.38+0.42)/2	1.0	-64.8000	-
4	100.00 to 200.00 m	2	50.000	1.550	(0.42+0.45)/2	1.0	-67.4250	-
5	200.00 to 250.00 m	1	50.000	1.600	(0.45+0.45)/2	1.0	-36.0000	-
6	250.00 to 270.00 m	1	20.000	1.580	(0.45+0.40)/2	1.0	-13.4300	-
Deductions.								
7	Deduct 12.5 percent S.A.	1	639.145			0.13	-83.0890	-
8	Deduct 50 percent earth work for abled male.	1	556.056			0.5	-278.0280	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0989	300.0	329.67	305.5253	91657.58	
Total Quantity						820.8000 cum		
Total Deducted Quantity						-542.7720 cum		
Net Total Quantity						278.03 cum		
Say 278.0280 cum @ (₹) 329.67033 / cum						91657.58		
Unskilled wage						91657.58		
Unskilled Person-days						305.5252750308		
2	77.TM.A.19.1.AM -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Male)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Work executed by abled male.								

1	50 percent of earth work.	1	556.056			0.5	278.0280	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	0.9709	300.0	291.26	269.9301	80979.03	
Total Quantity					278.0280 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					278.03 cum			
Say 278.0280 cum @ (₹) 291.262136 / cum					80979.03			
Unskilled wage					80979.03			
Unskilled Person-days					269.93009715936			
3	77.55.1 -- Taking services of Beldar for drinking water arrangement							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Beldar.	1	14.000			1.0	14.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0000	300.0	300.0	14.0000	4200.0	
Total Quantity					14.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					14.00 Day			
Say 14.0000 Day @ (₹) 300.0 / Day					4200.00			
Unskilled wage					4200.00			
Unskilled Person-days					14.0			
4	77.55.7 -- Employing Mate for supervision of labour engaged on work.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Mate.	1	14.000			1.0	14.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	1.0000	310.0	310.0	14.0000	4340.0	
Total Quantity					14.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					14.00 Day			
Say 14.0000 Day @ (₹) 310.0 / Day					4340.00			
2	Lump sum Type : Material	Display Board / CIB					5250.0	
3	Lump sum Type : Material	Miscellaneous /Contingencies charges					531.0	
Shape Type								LINE
Measurement						Length (in Meter)	270	

Total (₹) :	186957.61
Rounded Total (₹) :	1,86,958.00
Rupees One Lakh Eighty Six Thousand Nine Hundred and Fifty Eight Only	
Unskilled Manpower wages	176836.61
Materials (Includes Extra Charges)	0.00
Carriage	0.00
Skilled	0.00
SemiSkilled	4340.00
Lumpsum Admin	0.00
Lumpsum Material	5781.00
No of Person days	589.46

Site Before

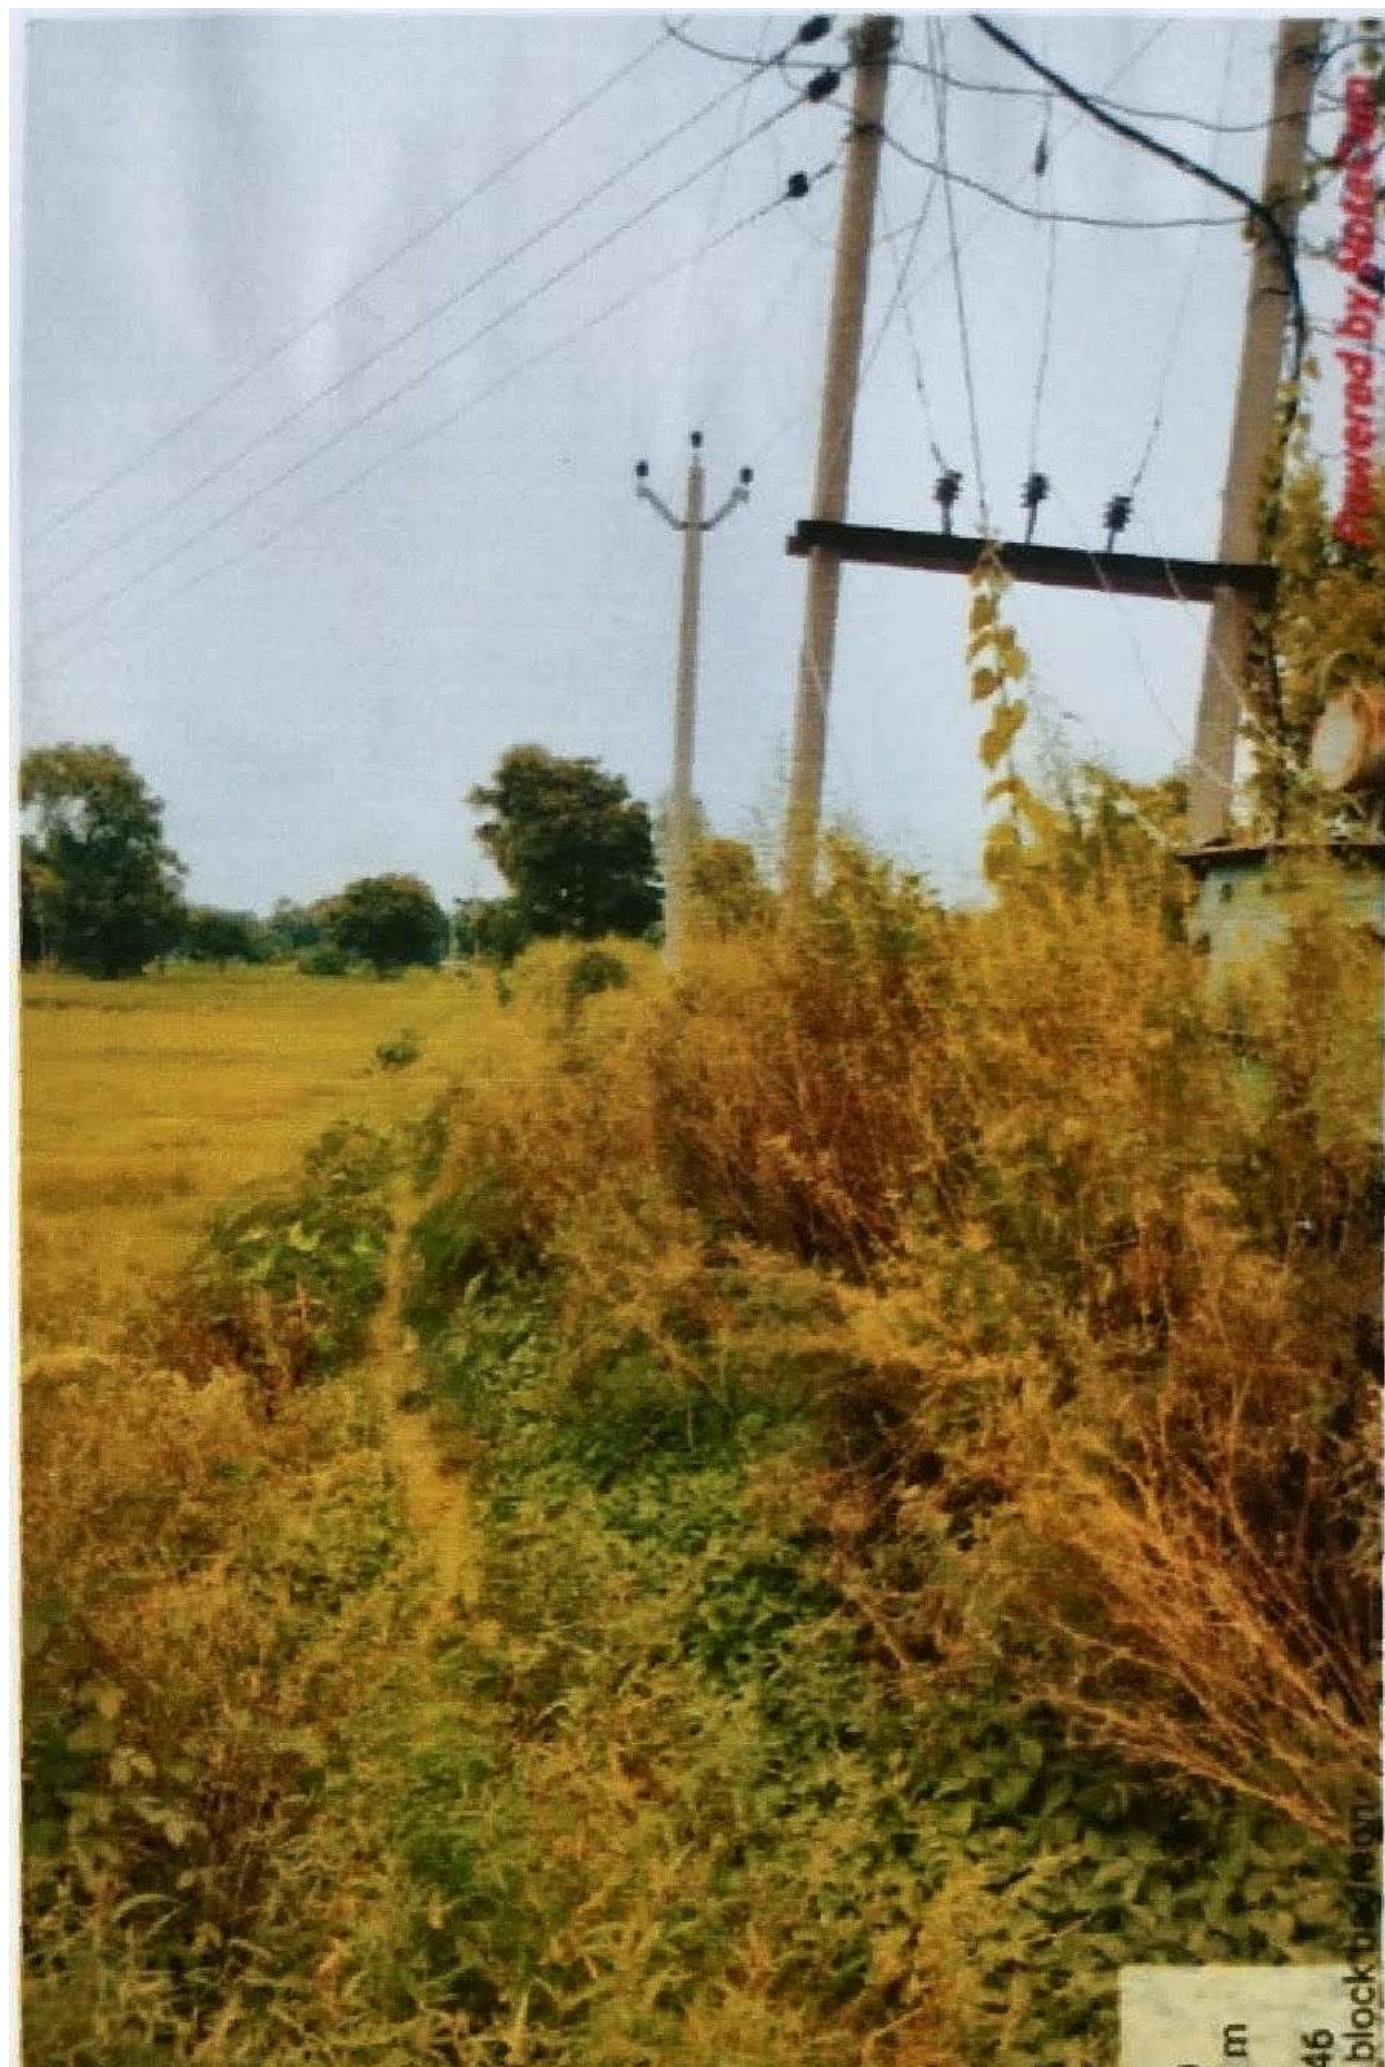



Latitude: 26.081012
Longitude: 83.493469
Elevation: 75.41±2.66
Accuracy: 3.79 m
Time: 08-17-2026 13:
Note: Gram mishrauli