

Detailed Estimate

SoR Period: 10/04/2025 - 31/03/2026 Created By: SANJAY KUMAR SINGH

MISROULI ME VIJAY SHANKAR KE KHET SE NADI TAK MITTI CHAKMARG

3156004040/RC/VB/YD/958486255824278992


BLOCK: BADRAON, GRAMA PANCHAYAT : MISROULI

Heading / Description: 1 - Item of work								
1	77.TM.A.19.1.AF -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Female)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Earthwork in filing.								
1	00.00 to 300.00 m	6	50.000	(3.00+4.60)/2	0.800	1.0	912.0000	-
2	300.00 to 320.00 m	1	20.000	(3.00+4.60)/2	0.800	1.0	60.8000	-
Existing in earth work quantity.								
3	00.00 to 100.00 m	2	50.000	2.450	(0.45+0.48)/2	1.0	-113.9250	-
4	100.00 to 200.00 m	2	50.000	2.400	(0.48+0.45)/2	1.0	-111.6000	-
5	200.00 to 300.00 m	2	50.000	2.430	(0.45+0.48)/2	1.0	-112.9950	-
6	300.00 to 320.00 m	1	20.000	2.480	(0.48+0.45)/2	1.0	-23.0640	-
Deductions.								
7	Deduct 12.5 percent S.A.	1	611.216			0.13	-79.4580	-
8	Deduct 50 percent of earth work for abled male.	1	531.758			0.5	-265.8790	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0989	300.0	329.67	292.1747	87652.42	
Total Quantity						972.8000 cum		
Total Deducted Quantity						-706.9210 cum		
Net Total Quantity						265.88 cum		
Say 265.8790 cum @ (₹) 329.67033 / cum						87652.42		
Unskilled wage						87652.42		
Unskilled Person-days						292.1747255669		
2	77.TM.A.19.1.AM -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Male)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Work executed by abled male.								

1	50 percent of earth work.	1	531.758			0.5	265.8790	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	0.9709	300.0	291.26	258.1350	77440.49	
Total Quantity					265.8790 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					265.88 cum			
Say 265.8790 cum @ (₹) 291.262136 / cum					77440.49			
Unskilled wage					77440.49			
Unskilled Person-days					258.13495152514673			
3	77.55.1 -- Taking services of Beldar for drinking water arrangement							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Brlдар.	1	14.000			1.0	14.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0000	300.0	300.0	14.0000	4200.0	
Total Quantity					14.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					14.00 Day			
Say 14.0000 Day @ (₹) 300.0 / Day					4200.00			
Unskilled wage					4200.00			
Unskilled Person-days					14.0			
4	77.55.7 -- Employing Mate for supervision of labour engaged on work.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Mate.	1	14.000			1.0	14.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	1.0000	310.0	310.0	14.0000	4340.0	
Total Quantity					14.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					14.00 Day			
Say 14.0000 Day @ (₹) 310.0 / Day					4340.00			
2	Lump sum Type : Material	Display Board / CIB					5250.0	
3	Lump sum Type : Material	Miscellaneous /Contingencies charges					531.0	
Shape Type								LINE
Measurement						Length (in Meter)	320	

Total (₹) :	179413.90
Rounded Total (₹) :	1,79,414.00
Rupees One Lakh Seventy Nine Thousand Four Hundred and Fourteen Only	
Unskilled Manpower wages	169292.90
Materials (Includes Extra Charges)	0.00
Carriage	0.00
Skilled	0.00
SemiSkilled	4340.00
Lumpsum Admin	0.00
Lumpsum Material	5781.00
No of Person days	564.31

Site Before

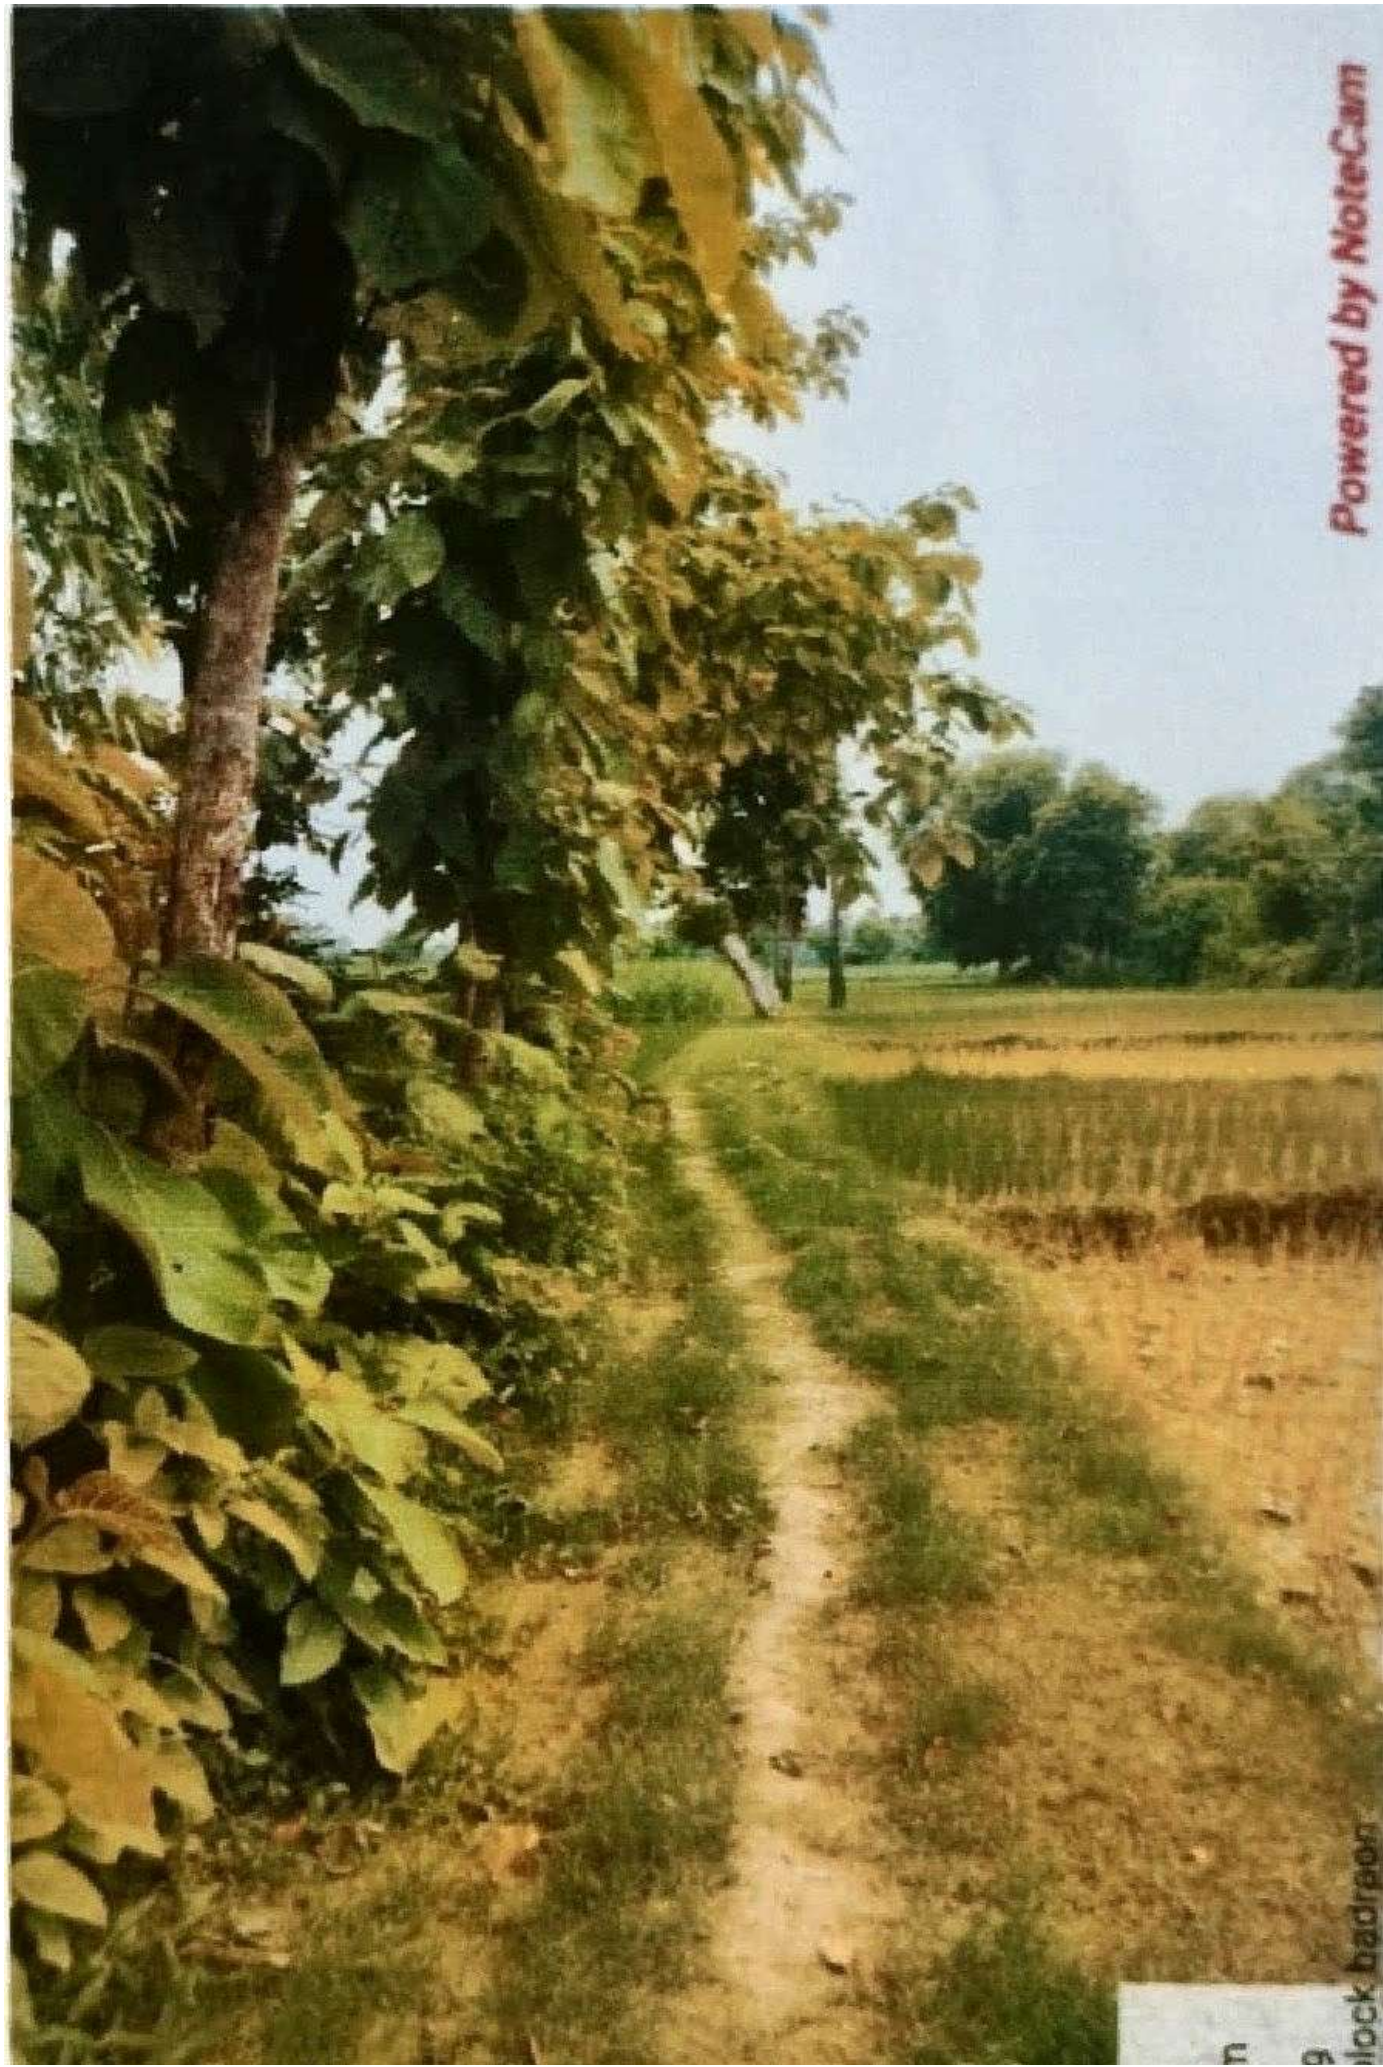



Latitude: 26.078766
Longitude: 83.484702
Elevation: 74.59±3.25 m
Accuracy: 4.271 m
Time: 07-30-2026 14:04
Note: Gram mishrauli b