

Detailed Estimate

SoR Period: 10/04/2025 - 31/03/2026 Created By: SANJAY KUMAR SINGH

MISHROULI ME MUNNA KE KHET SE ALAGU KE KHET TAK MITTI CHAKMARG

3156004040/RC/VB/YD/958486255824278990


BLOCK: BADRAON, GRAMA PANCHAYAT : MISROULI

Heading / Description: 1 - Item of work								
1	77.TM.A.19.1.AF -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Female)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Existing in earth work quantity.								
1	00.00 to 200.00 m	4	50.000	(3.00+4.70)/2	0.850	1.0	654.5000	-
Existing in earth work quantity.								
2	00.00 to 100.00 m	2	50.000	2.260	(0.36+0.40)/2	1.0	-85.8800	-
3	100.00 to 200.00 m	2	50.000	2.300	(0.40+0.45)/2	1.0	-97.7500	-
Deductions.								
4	Deduct 12.5 percent S.A.	1	470.870			0.13	-61.2130	-
5	Deduct 50 percent of earth work for abled male.	1	409.657			0.5	-204.8280	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0989	300.0	329.67	225.0868	67526.04	
Total Quantity						654.5000 cum		
Total Deducted Quantity						-449.6710 cum		
Net Total Quantity						204.83 cum		
Say 204.8290 cum @ (₹) 329.67033 / cum						67526.04		
Unskilled wage						67526.04		
Unskilled Person-days						225.08681341189998		
2	77.TM.A.19.1.AM -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Male)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Work executed by abled male.								
1	50 percent of earth work.	1	409.657			0.5	204.8280	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	

0114	Beldar	Day	0.9709	300.0	291.26	198.8621	59658.64	
Total Quantity					204.8280 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					204.83 cum			
Say 204.8280 cum @ (₹) 291.262136 / cum					59658.64			
Unskilled wage					59658.64			
Unskilled Person-days					198.86213597536			
3	77.55.1 -- Taking services of Beldar for drinking water arrangement							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Beldar.	1	14.000			1.0	14.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0000	300.0	300.0	14.0000	4200.0	
Total Quantity					14.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					14.00 Day			
Say 14.0000 Day @ (₹) 300.0 / Day					4200.00			
Unskilled wage					4200.00			
Unskilled Person-days					14.0			
4	77.55.7 -- Employing Mate for supervision of labour engaged on work.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Mate.	1	14.000			1.0	14.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	1.0000	310.0	310.0	14.0000	4340.0	
Total Quantity					14.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					14.00 Day			
Say 14.0000 Day @ (₹) 310.0 / Day					4340.00			
2	Lump sum Type : Material	Display Board / CIB					5250.0	
3	Lump sum Type : Material	Miscellaneous /Contingencies charges					531.0	
Shape Type							LINE	
Measurement						Length (in Meter)	200	
Total (₹) :							141505.68	
Rounded Total (₹) :							1,41,506.00	
Rupees One Lakh Forty One Thousand Five Hundred and Six Only								
Unskilled Manpower wages							131384.68	

Materials (Includes Extra Charges)	0.00
Carriage	0.00
Skilled	0.00
SemiSkilled	4340.00
Lumpsum Admin	0.00
Lumpsum Material	5781.00
No of Person days	437.95

Site Before

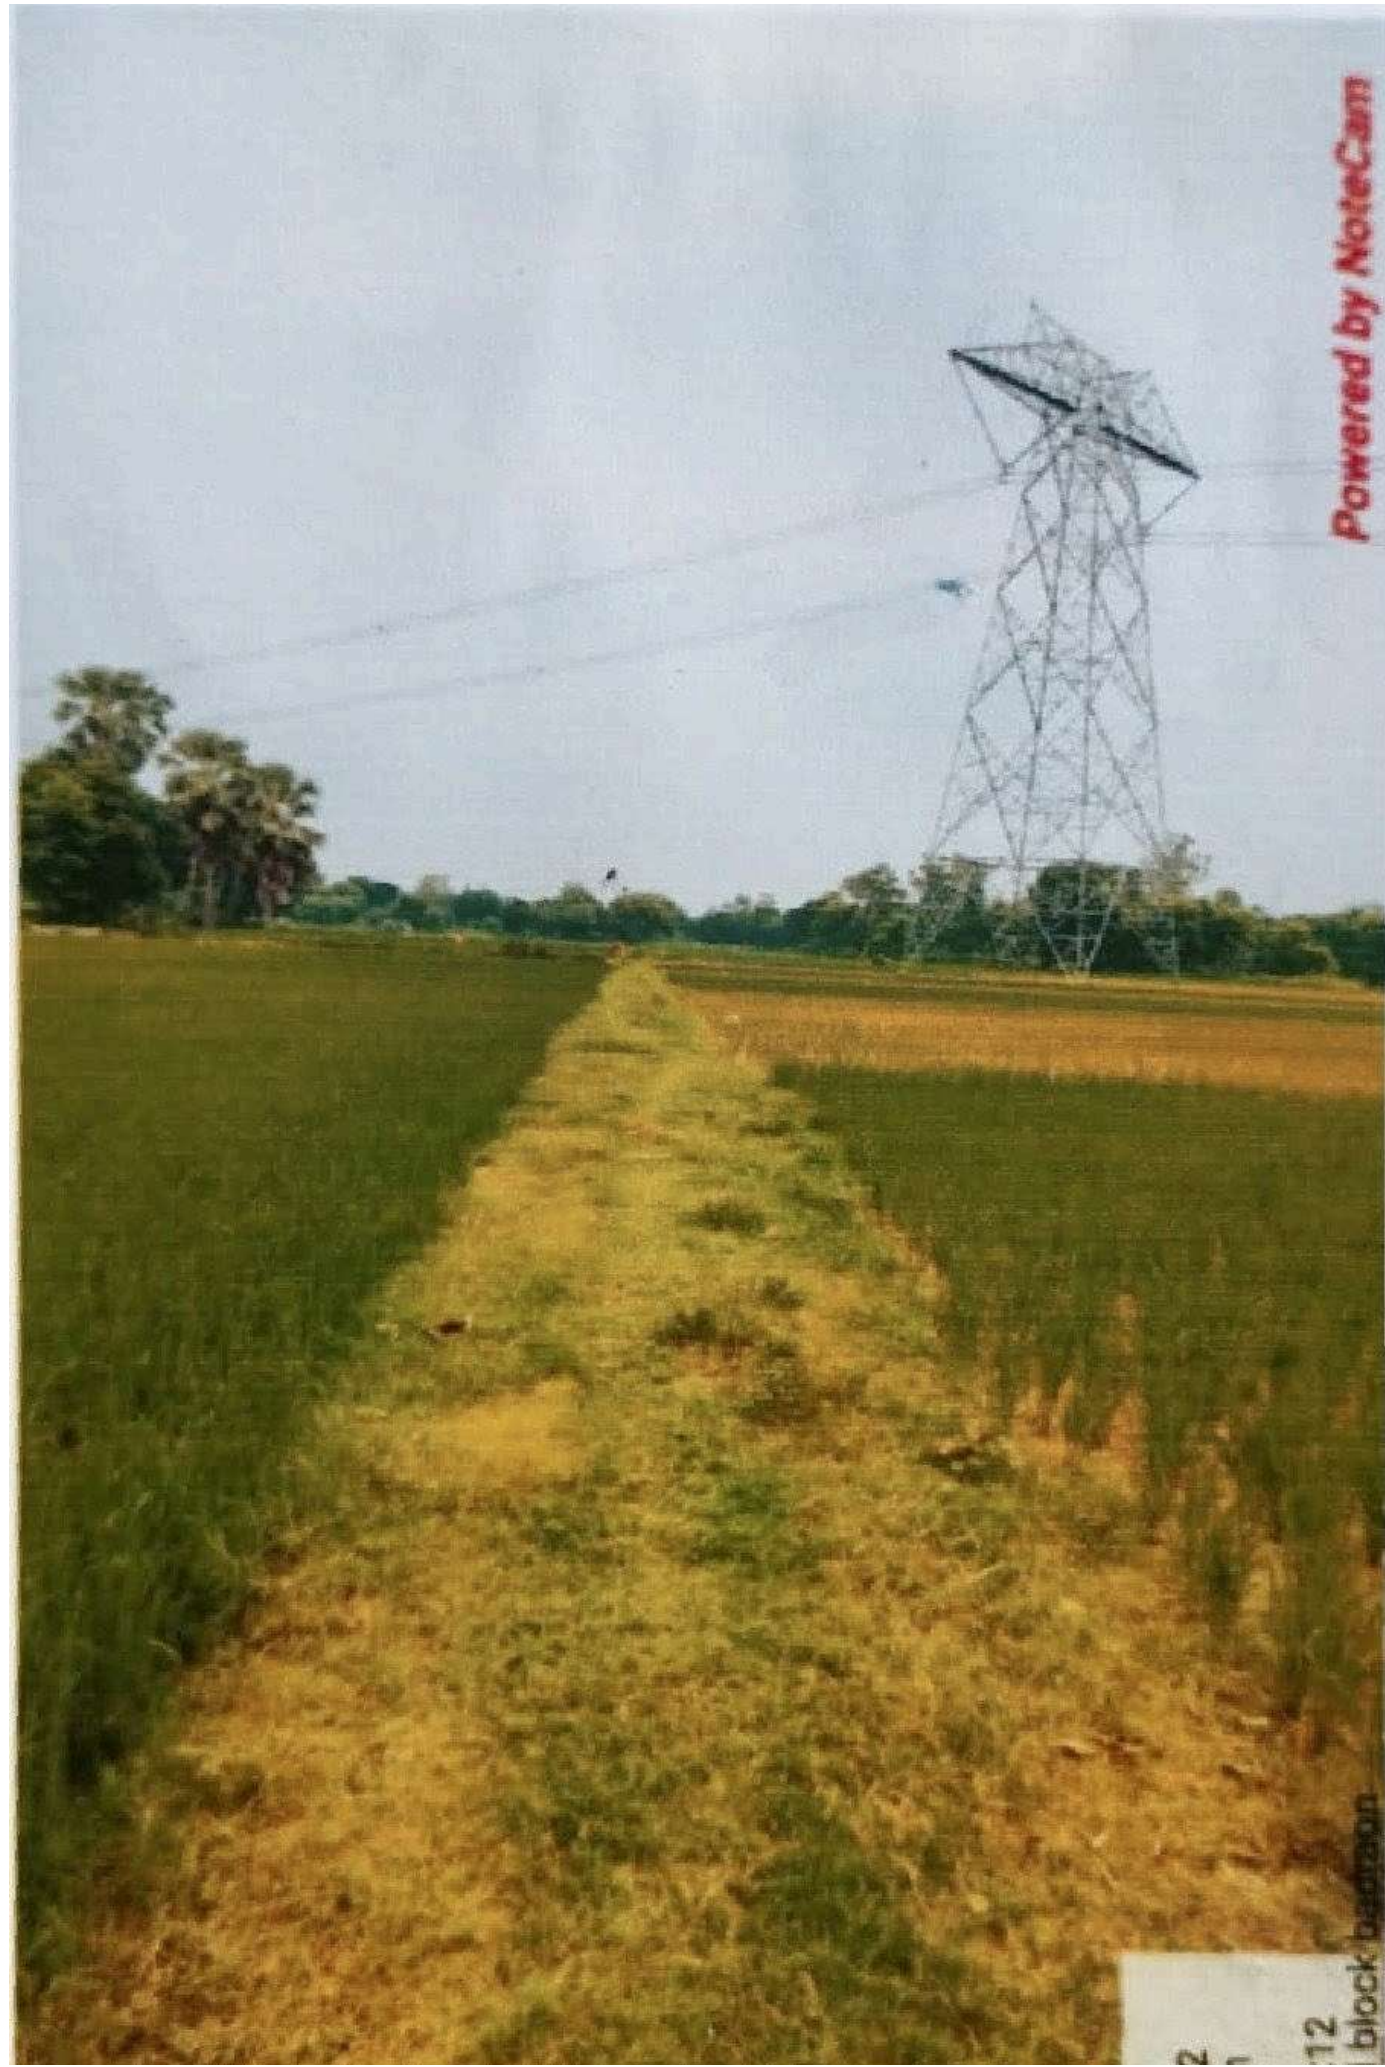



Latitude: 26.077408
Longitude: 83.483902
Elevation: 74.4±2.5 m
Accuracy: 3.752 m
Time: 07-30-2026 14:
Note: Gram mishrauli