

Detailed Estimate

SoR Period: 10/04/2025 - 31/03/2026 Created By: SANJAY KUMAR SINGH

MISROULI ME TARA DEVI KE KHET SE RAMMURAT KE GHAR TAK MITTI CHAKMARG

3156004040/RC/VB/YD/958486255824278994


BLOCK: BADRAON, GRAMA PANCHAYAT : MISROULI

Heading / Description: 1 - Item of work								
1	77.TM.A.19.1.AF -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Female)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Earthwork in filing.								
1	00.00 to 200.00 m	4	50.000	(3.00+4.70)/2	0.850	1.0	654.5000	-
Existing in earth work quantity.								
2	00.00 to 100.00 m	2	50.000	2.350	(0.32+0.37)/2	1.0	-81.0750	-
3	100.00 to 200.00 m	2	50.000	2.300	(0.37+0.35)/2	1.0	-82.8000	-
Deductions.								
4	Deduct 12.5 percent S.A.	1	490.625			0.13	-63.7810	-
5	Deduct 50 percent of earth work for abled male.	1	426.844			0.5	-213.4220	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0989	300.0	329.67	234.5297	70358.9	
Total Quantity						654.5000 cum		
Total Deducted Quantity						-441.0780 cum		
Net Total Quantity						213.42 cum		
Say 213.4220 cum @ (₹) 329.67033 / cum						70358.90		
Unskilled wage						70358.90		
Unskilled Person-days						234.5296705641999		
2	77.TM.A.19.1.AM -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Male)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Work executed by abled male.								
1	50 percent of earth work.	1	426.844			0.5	213.4220	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	

0114	Beldar	Day	0.9709	300.0	291.26	207.2058	62161.75	
Total Quantity					213.4220 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					213.42 cum			
Say 213.4220 cum @ (₹) 291.262136 / cum					62161.75			
Unskilled wage					62161.75			
Unskilled Person-days					207.20582529797332			
3	77.55.1 -- Taking services of Beldar for drinking water arrangement							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Beldar.	1	14.000			1.0	14.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0000	300.0	300.0	14.0000	4200.0	
Total Quantity					14.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					14.00 Day			
Say 14.0000 Day @ (₹) 300.0 / Day					4200.00			
Unskilled wage					4200.00			
Unskilled Person-days					14.0			
4	77.55.7 -- Employing Mate for supervision of labour engaged on work.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Mate.	1	14.000			1.0	14.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	1.0000	310.0	310.0	14.0000	4340.0	
Total Quantity					14.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					14.00 Day			
Say 14.0000 Day @ (₹) 310.0 / Day					4340.00			
2	Lump sum Type : Material	Display Board / CIB					5250.0	
3	Lump sum Type : Material	Miscellaneous /Contingencies charges					531.0	
Shape Type							LINE	
Measurement						Length (in Meter)	200	
Total (₹) :							146841.65	
Rounded Total (₹) :							1,46,842.00	
Rupees One Lakh Forty Six Thousand Eight Hundred and Forty Two Only								
Unskilled Manpower wages							136720.65	

Materials (Includes Extra Charges)	0.00
Carriage	0.00
Skilled	0.00
SemiSkilled	4340.00
Lumpsum Admin	0.00
Lumpsum Material	5781.00
No of Person days	455.74

Site Before

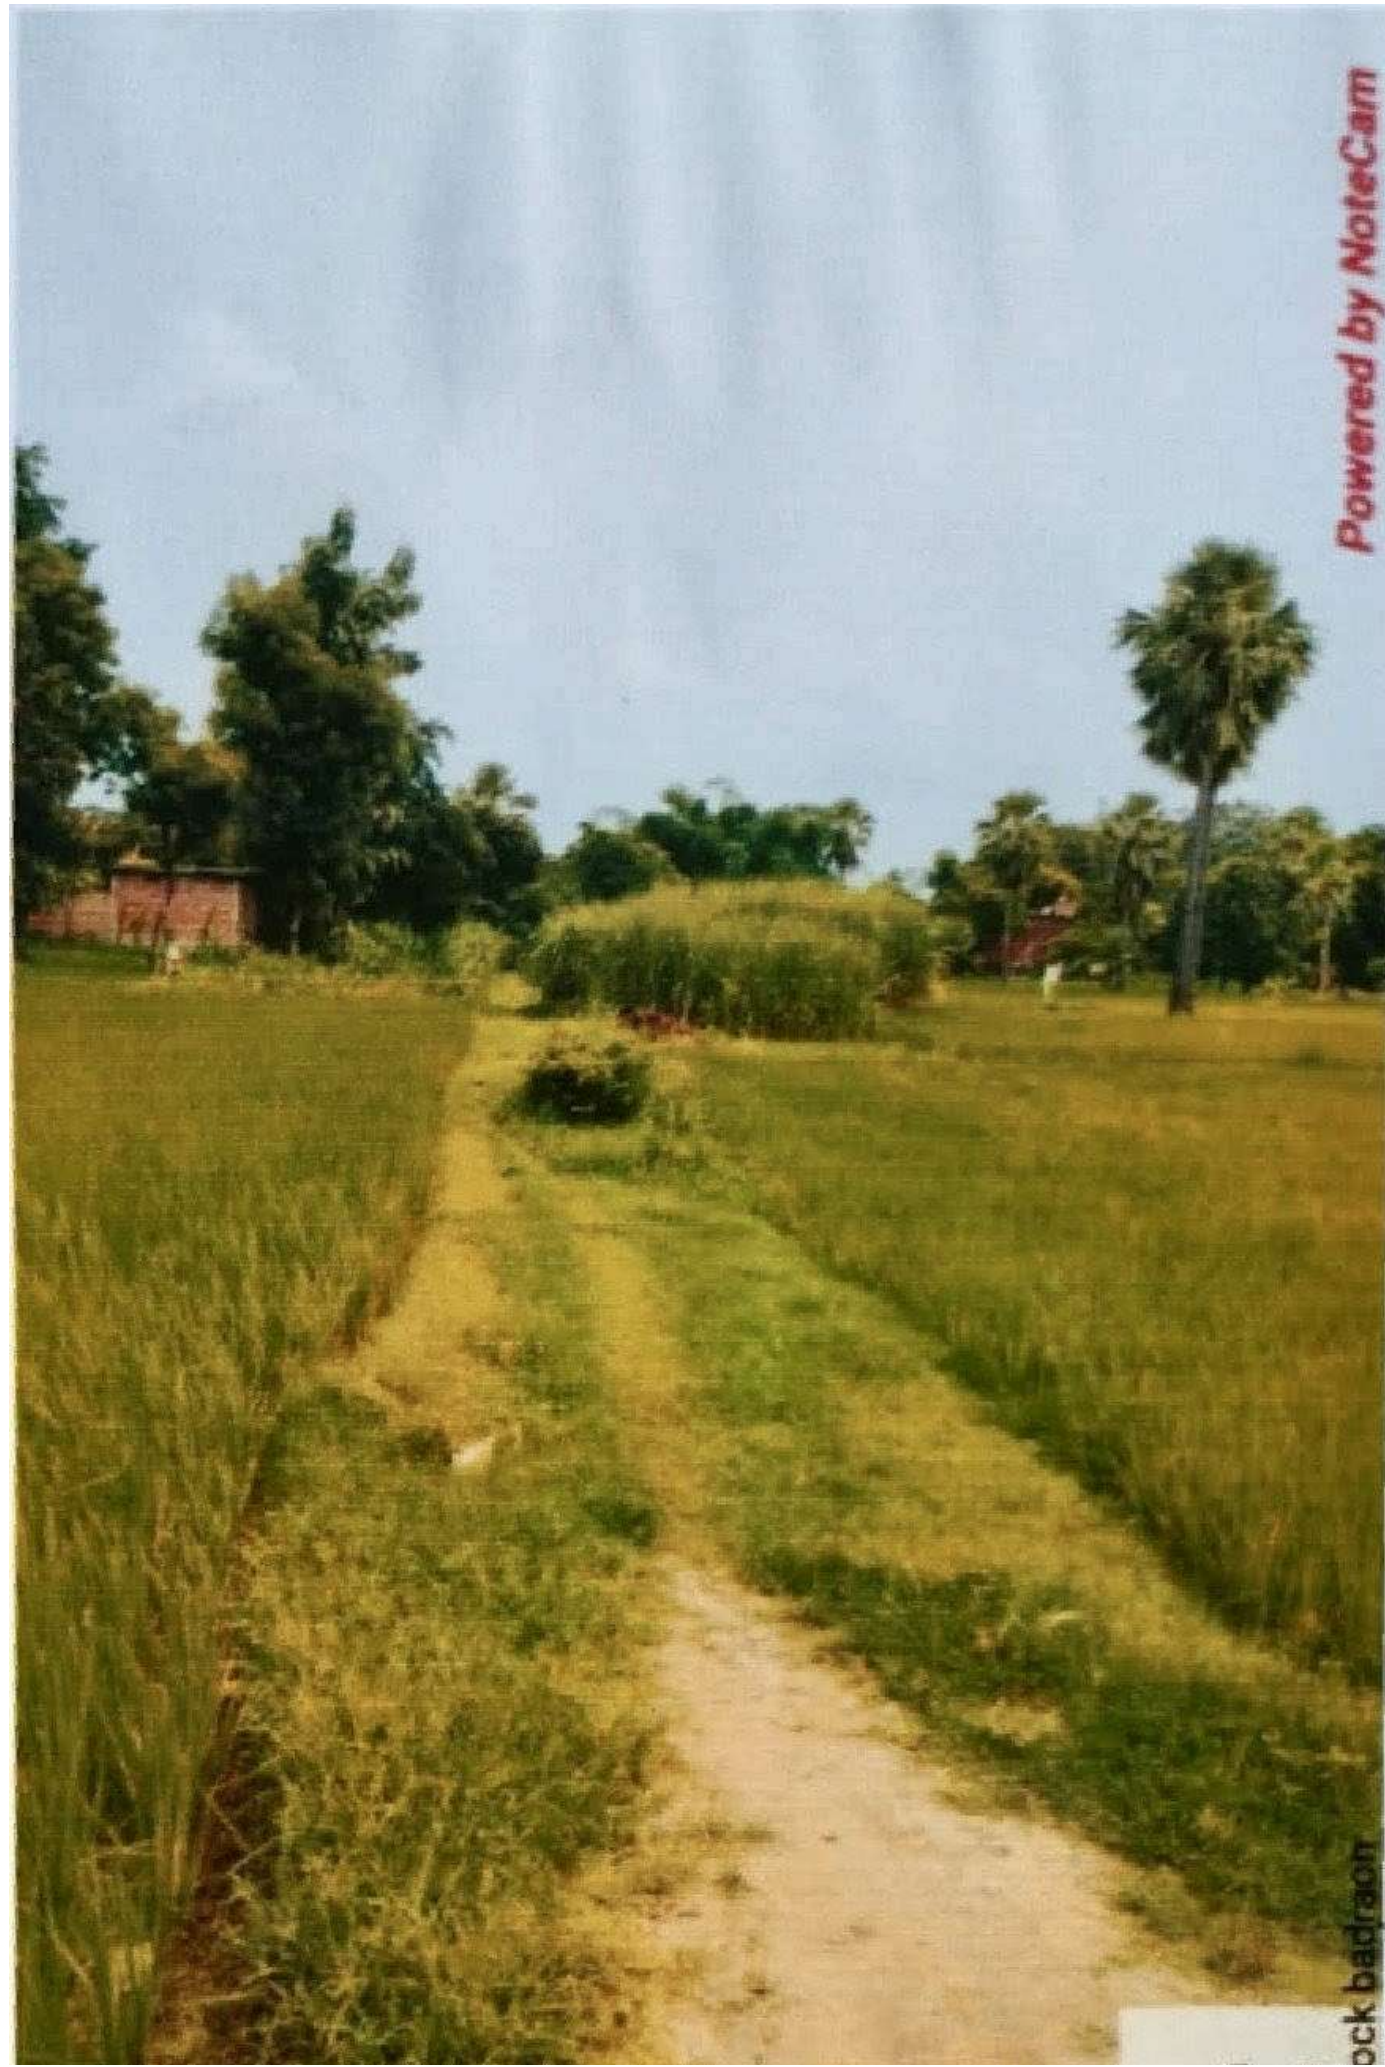

Powered by NoteCam

ock badraon



Latitude: 26.082125
Longitude: 83.496745
Elevation: 80.71±9.33 m
Accuracy: 9.069 m
Time: 08-17-2026 14:07
Note: Gram mishrauli bl