

Detailed Estimate

SoR Period: 10/04/2025 - 31/03/2026 Created By: SANJAY KUMAR SINGH

MISROULI ME LALMUNI KE KHET SE PAPPU KE KHET TAK MITTI CHAKMARG

3156004040/RC/VB/YD/958486255824278996


BLOCK: BADRAON, GRAMA PANCHAYAT : MISROULI

Heading / Description: 1 - Item of work								
1	77.TM.A.19.1.AF -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Female)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Earthwork in filing.								
1	00.00 to 450.00 m	9	50.000	(3.00+4.60)/2	0.800	1.0	1368.0000	-
Existing in earth work quantity.								
2	00.00 to 100.00 m	2	50.000	2.220	0.380	1.0	-84.3600	-
3	100.00 to 200.00 m	2	50.000	2.300	0.350	1.0	-80.5000	-
4	200.00 to 300.00 m	2	50.000	2.260	0.400	1.0	-90.4000	-
5	300.00 to 400.00 m	2	50.000	2.150	0.430	1.0	-92.4500	-
6	400.00 to 450.00 m	1	50.000	2.200	0.400	1.0	-44.0000	-
Deductions.								
7	Deduct 12.5 percent S.A.	1	976.290			0.13	-122.0360	-
8	Deduct 50 percent of earth work for abled male.	1	854.254			0.5	-427.1270	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0989	300.0	329.67	469.3703	140811.1	
Total Quantity					1368.0000 cum			
Total Deducted Quantity					-940.8730 cum			
Net Total Quantity					427.13 cum			
Say 427.1270 cum @ (₹) 329.67033 / cum					140811.10			
Unskilled wage					140811.10			
Unskilled Person-days					469,3703301396999			
2	77.TM.A.19.1.AM -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Male)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Work executed by abled male.								

1	50 percent of earth work.	1	854.254			0.5	427.1270	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	0.9709	300.0	291.26	414.6864	124405.92	
Total Quantity					427.1270 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					427.13 cum			
Say 427.1270 cum @ (₹) 291.262136 / cum					124405.92			
Unskilled wage					124405.92			
Unskilled Person-days					414.68640787757334			
3	77.55.1 -- Taking services of Beldar for drinking water arrangement							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Beldar.	1	30.000			1.0	30.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0000	300.0	300.0	30.0000	9000.0	
Total Quantity					30.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					30.00 Day			
Say 30.0000 Day @ (₹) 300.0 / Day					9000.00			
Unskilled wage					9000.00			
Unskilled Person-days					30.0			
4	77.55.7 -- Employing Mate for supervision of labour engaged on work.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Mate.	1	30.000			1.0	30.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	1.0000	310.0	310.0	30.0000	9300.0	
Total Quantity					30.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					30.00 Day			
Say 30.0000 Day @ (₹) 310.0 / Day					9300.00			
2	Lump sum Type : Material	Display Board / CIB						5250.0
3	Lump sum Type : Material	Miscellaneous /Contingencies charges						531.0
Shape Type								LINE
Measurement							Length (in Meter)	450

Total (₹) :	289298.02
Rounded Total (₹) :	2,89,298.00
Rupees Two Lakh Eighty Nine Thousand Two Hundred and Ninety Eight Only	
Unskilled Manpower wages	274217.02
Materials (Includes Extra Charges)	0.00
Carriage	0.00
Skilled	0.00
SemiSkilled	9300.00
Lumpsum Admin	0.00
Lumpsum Material	5781.00
No of Person days	914.06

Site Before

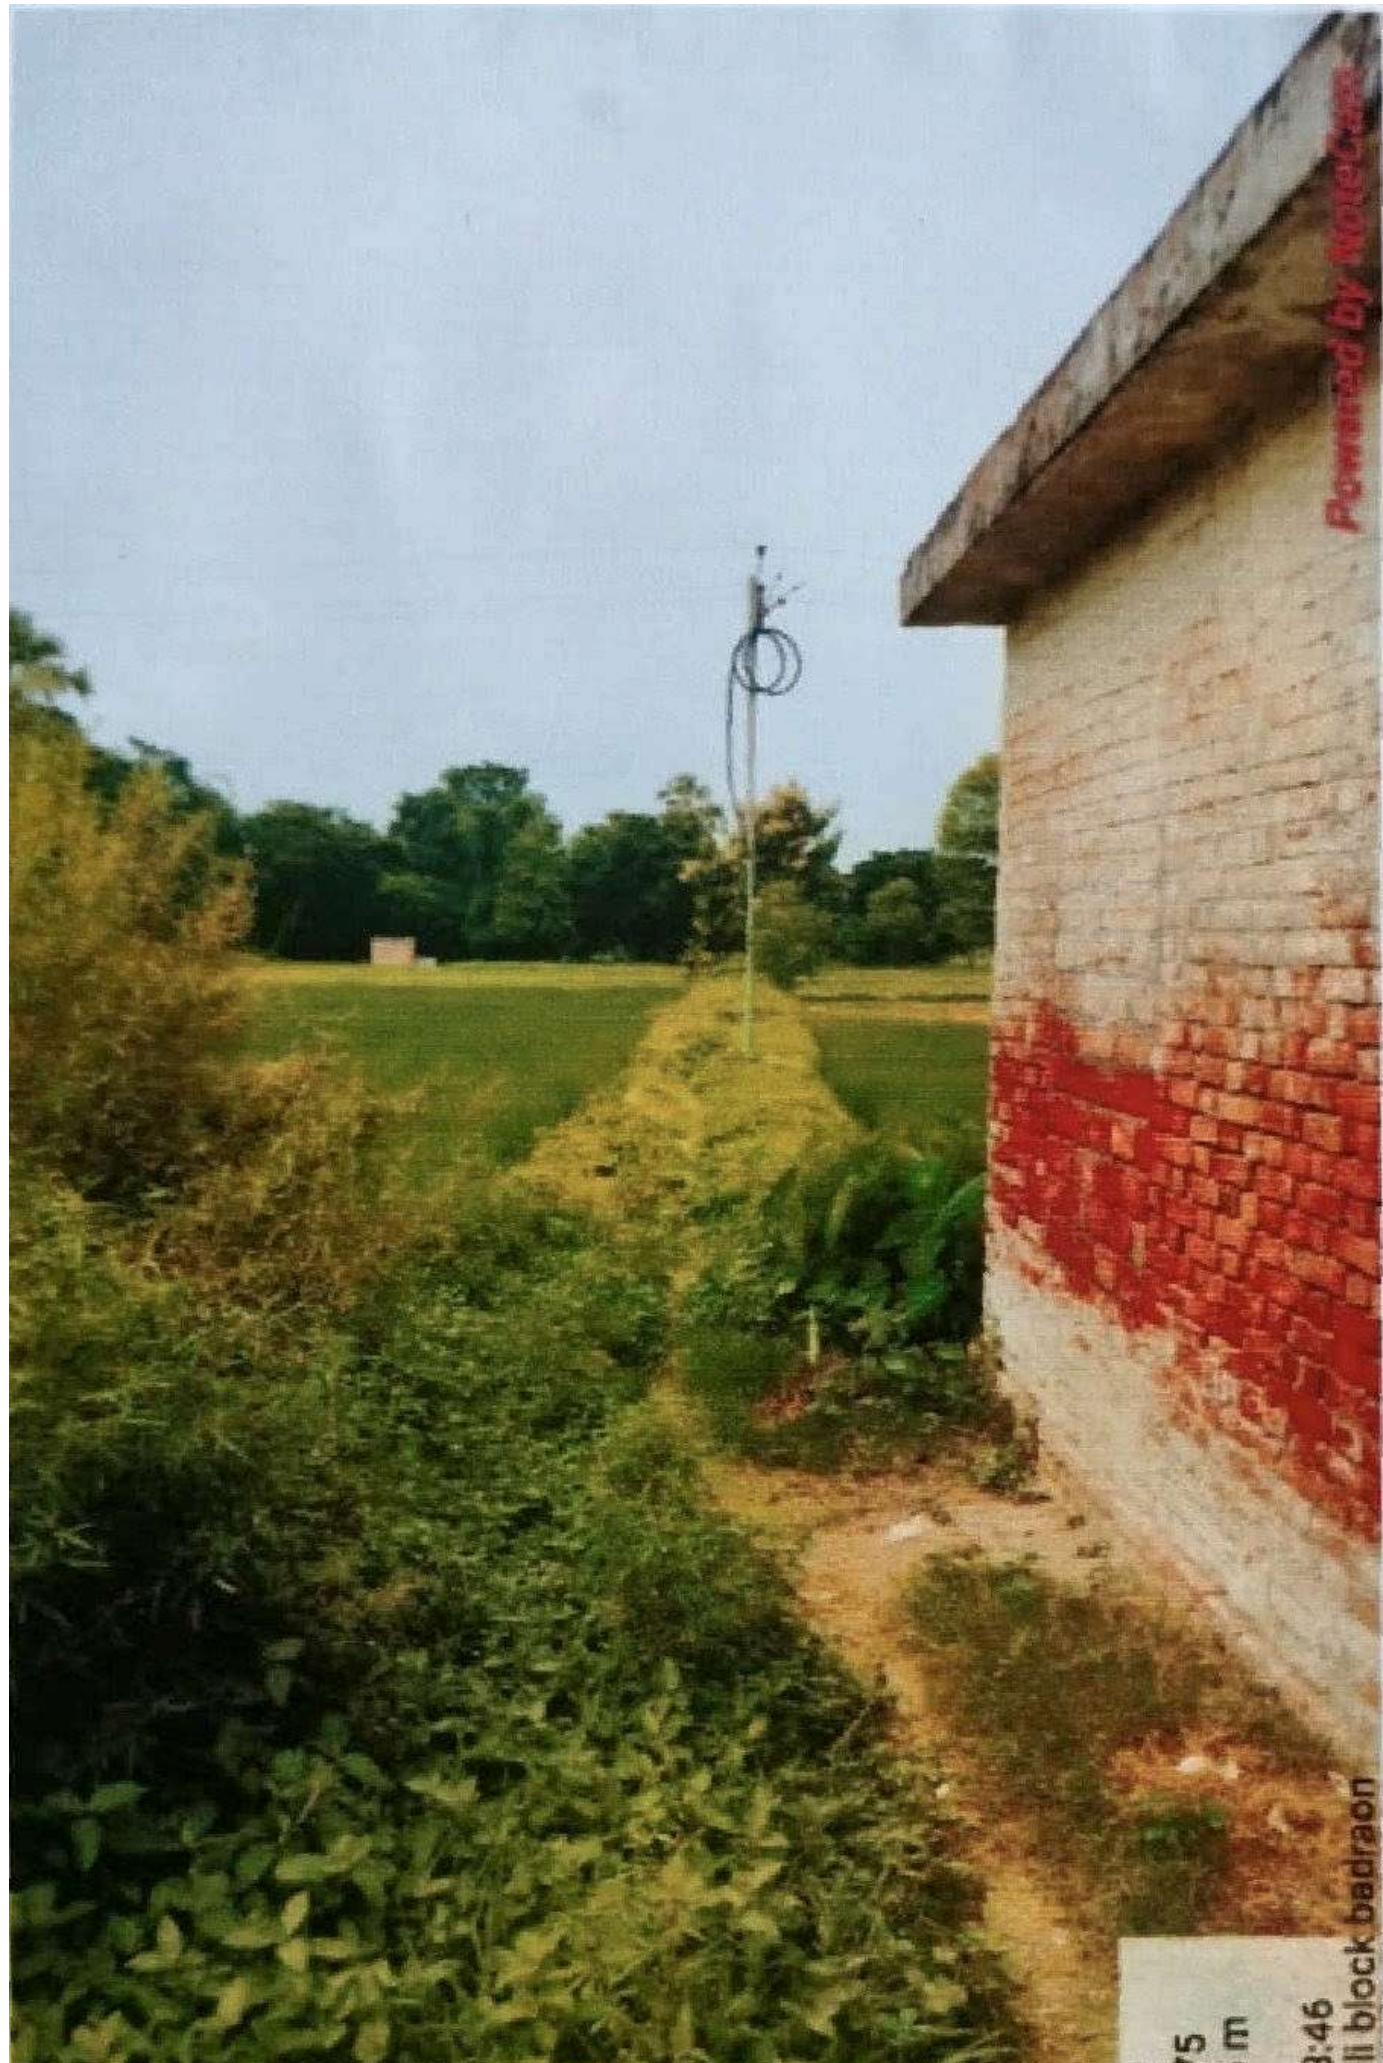



Latitude: 26.081144
Longitude: 83.49297
Elevation: 76.79±2.5
Accuracy: 3.79 m
Time: 08-17-2026 13
Note: Gram mishrau