

Detailed Estimate

SoR Period: 10/04/2025 - 31/03/2026 Created By: BRIJBHUSHAN PANDEY

GP PAHADIPUR ME PICH MARG SE MUNNA NAI KE KHET TAK CHAK BANDH PAR MITTI KARY

3156002059/RC/VB/YD/958486255824276725


BLOCK: FATEHPUR MADAUN, GRAMA PANCHAYAT : PAHADIPUR

Heading / Description: 1 - Item of work								
1	77.TM.A.19.1.AF -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Female)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Earthwork in filing.								
1	00.00 to 200.00 m	4	50.000	(3.00+4.60)/2	0.800	1.0	608.0000	-
2	200.00 to 225.00 m	1	25.000	(3.00+4.60)/2	0.800	1.0	76.0000	-
Existing in earth work quantity.								
3	00.00 to 100.00 m	2	50.000	1.950	0.350	1.0	-68.2500	-
4	100.00 to 200.00 m	2	50.000	1.880	0.380	1.0	-71.4400	-
5	200.00 to 225.00 m	1	25.000	1.900	0.330	1.0	-15.6750	-
Deductions.								
6	Deduct 12.5 percent S.A.	1	528.635			0.13	-66.0790	-
7	Deduct 50 percent of earth work for abled male.	1	462.556			0.5	-231.2780	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0989	300.0	329.67	254.1516	76245.49	
Total Quantity						684.0000 cum		
Total Deducted Quantity						-452.7220 cum		
Net Total Quantity						231.28 cum		
Say 231.2780 cum @ (₹) 329.67033 / cum						76245.49		
Unskilled wage						76245.49		
Unskilled Person-days						254.15164860579995		
2	77.TM.A.19.1.AM -- Earthwork in filing for construction of road embankment from borrow pits with a lead up to 10 m and lift up to 1.5 m, spreading, grading, laying in 20 cm layers to required slope and camber, compacting with hand rammer complete as directed (rolling with road roller to be done where ever required). Ordinary Soil. (Work executed by Abled Male)							
SI No	Description	No	L	B	D	CF	Quantity	Remark
Work executed by abled male.								
1	50 percent of earth work.	1	462.556			0.5	231.2780	-

LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	0.9709	300.0	291.26	224.5417	67362.52	
Total Quantity					231.2780 cum			
Total Deducted Quantity					0.0000 cum			
Net Total Quantity					231.28 cum			
Say 231.2780 cum @ (₹) 291.262136 / cum					67362.52			
Unskilled wage					67362.52			
Unskilled Person-days					224.54174763269336			
3	77.55.1 -- Taking services of Beldar for drinking water arrangement							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Beldar.	1	20.000			1.0	20.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0114	Beldar	Day	1.0000	300.0	300.0	20.0000	6000.0	
Total Quantity					20.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					20.00 Day			
Say 20.0000 Day @ (₹) 300.0 / Day					6000.00			
Unskilled wage					6000.00			
Unskilled Person-days					20.0			
4	77.55.7 -- Employing Mate for supervision of labour engaged on work.							
SI No	Description	No	L	B	D	CF	Quantity	Remark
1	Mate.	1	20.000			1.0	20.0000	-
LIST								
Code	Description	Unit	Quantity	Rate(₹)	Amount (₹)	Total Quantity	Total Amount (₹)	
0128	Mate	Day	1.0000	310.0	310.0	20.0000	6200.0	
Total Quantity					20.0000 Day			
Total Deducted Quantity					0.0000 Day			
Net Total Quantity					20.00 Day			
Say 20.0000 Day @ (₹) 310.0 / Day					6200.00			
2	Lump sum Type : Material	Display Board / CIB					5250.0	
3	Lump sum Type : Material	Miscellaneous /Contingencies charges					531.0	
Shape Type								LINE
Measurement						Length (in Meter)	225	
Total (₹) :								161589.02

Rounded Total (₹) :	1,61,589.00
Rupees One Lakh Sixty One Thousand Five Hundred and Eighty Nine Only	
Unskilled Manpower wages	149608.02
Materials (Includes Extra Charges)	0.00
Carriage	0.00
Skilled	0.00
SemiSkilled	6200.00
Lumpsum Admin	0.00
Lumpsum Material	5781.00
No of Person days	498.69

Site Before

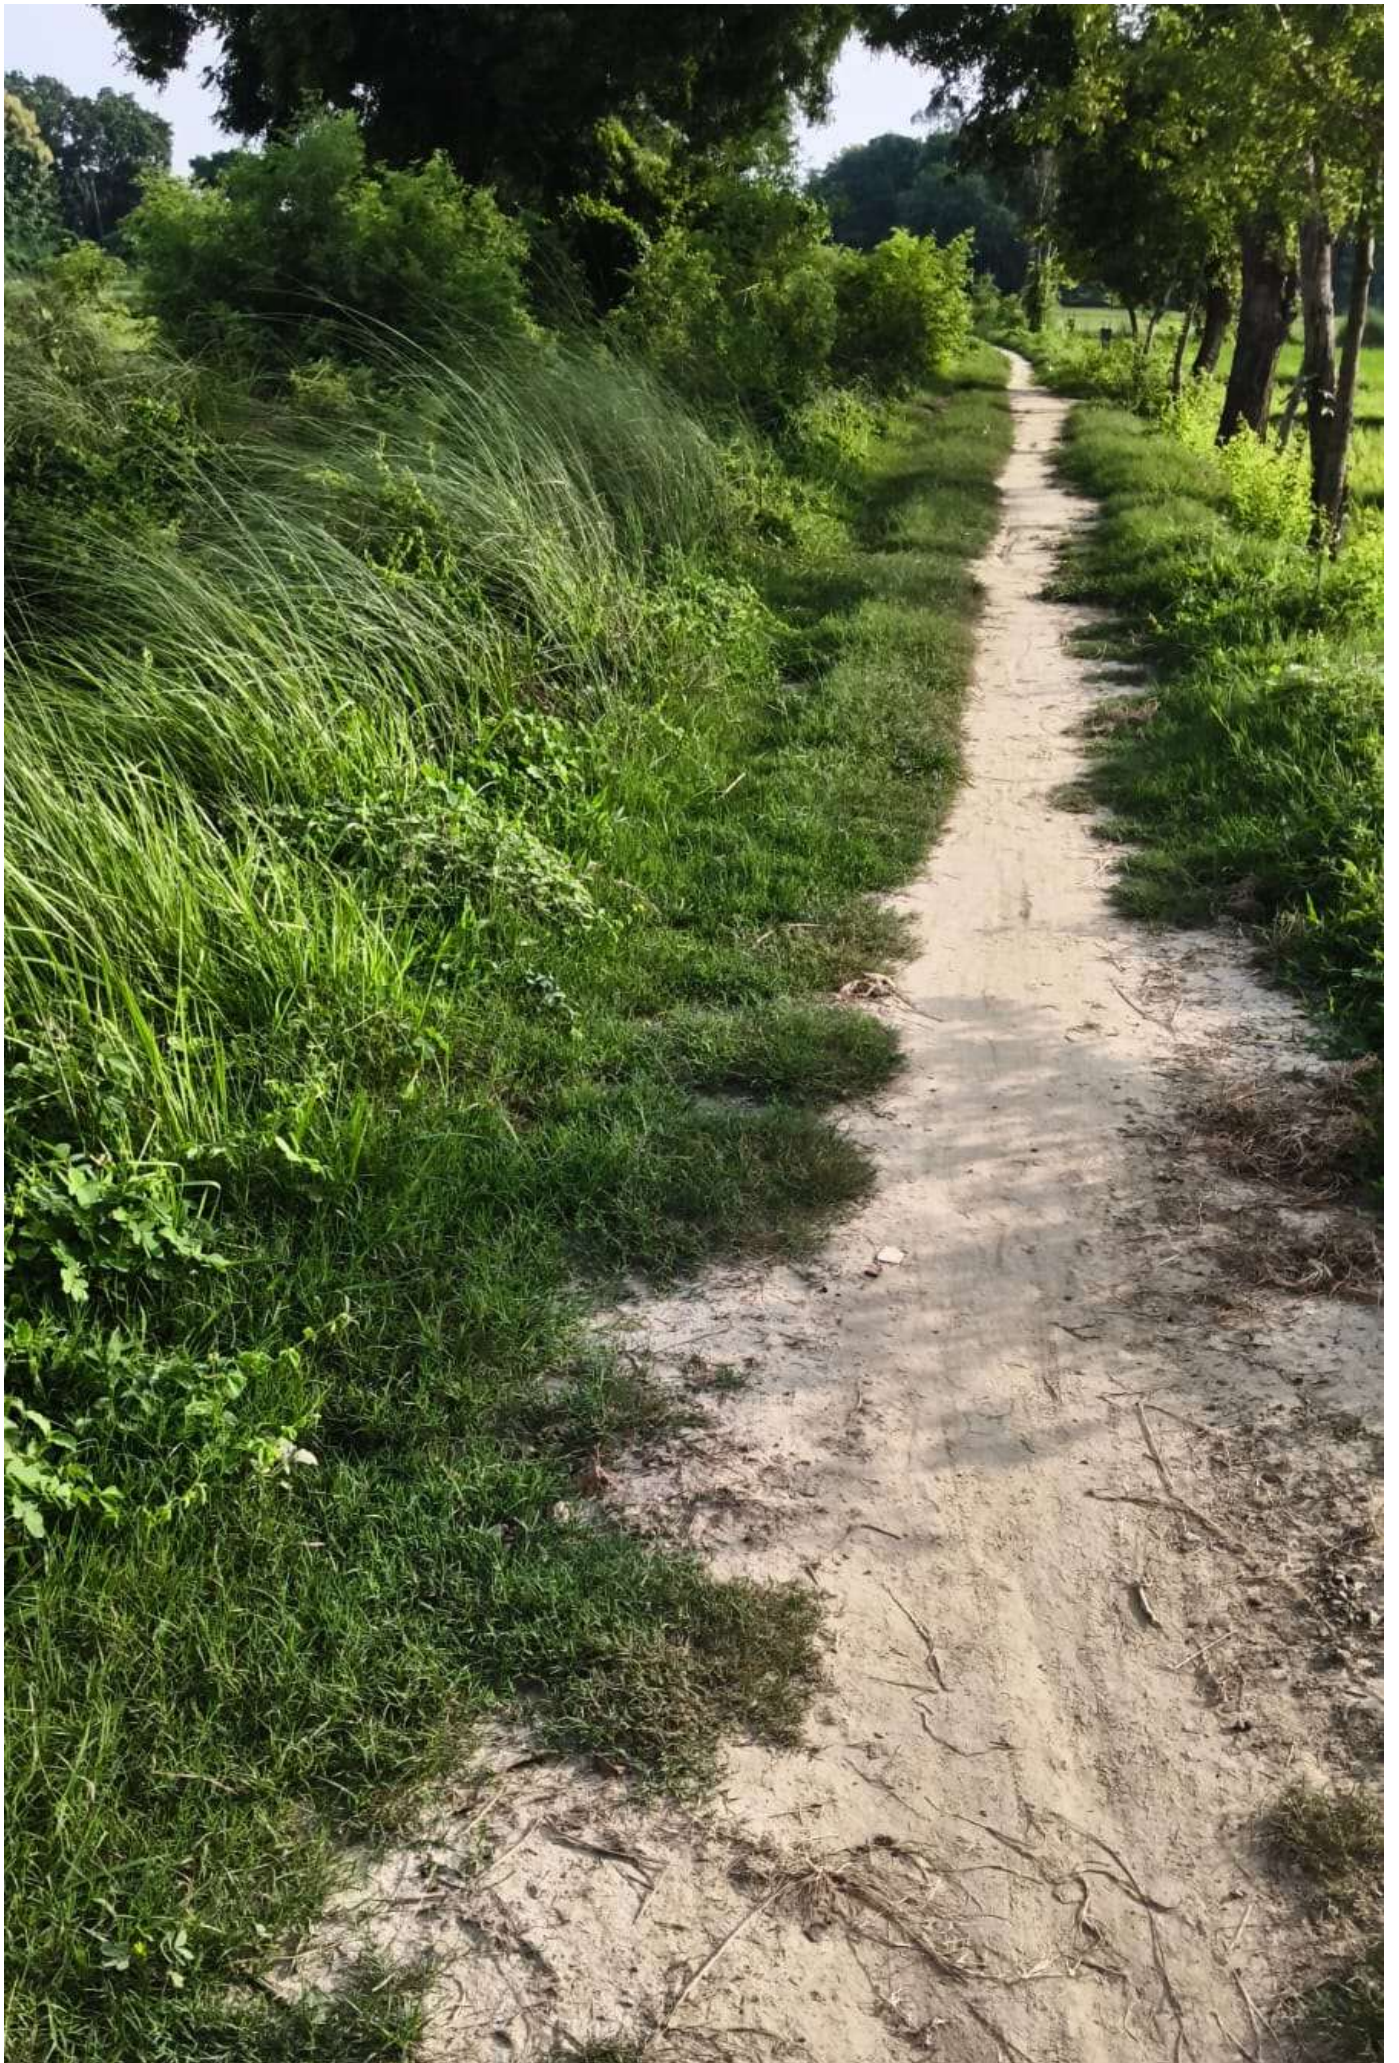



Latitude: 26.121864
Longitude: 83.753302
Elevation: 69.11±9.6 m
Accuracy: 2.72 m
Time: 07-29-2026 07:03

Powered by NoteCam